

CREW MEMBER UNIT

CZS-2CS

The CZS-2CS is a basic unit designed for members of the vehicle's crew. The device provides basic features such as intercom voice communication, access to radio and alarm broadcast. Like other FONET crew member units, CZS-2CS is fitted with a 3-button keyboard which provides an emergency broadcast mode and an access to voice menu of settings (e.g. voice level).

Available versions


CZS-2CS	Standard version	
CZS-2CS-A	Additional alarm input	
CZS-2CS-H	Additional headset connector	
CZS-2CS-C2	Additional data port (RS-232)	
CZS-2CS-C4	Additional data port (RS-422)	



www.wbgroup.pl



WB Electronics S.A. ul. Poznańska 129/133, 05-850 Ożarów Mazowiecki, Poland t: +48 22 731 25 00 | f: +48 22 731 25 01 info@wb.com.pl

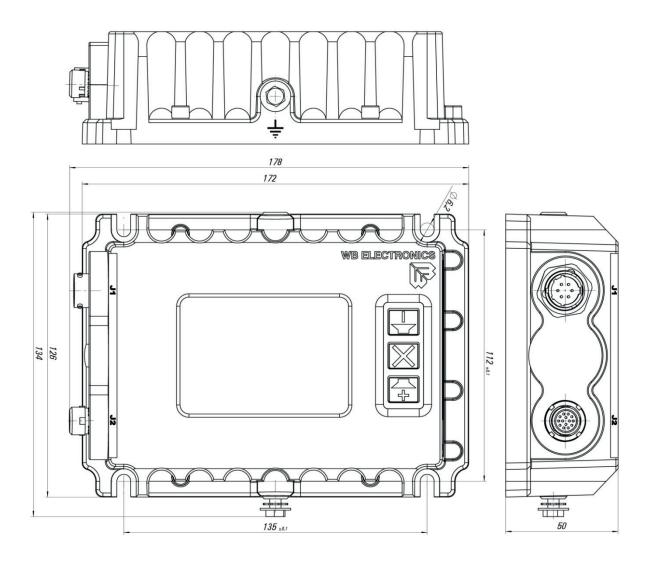

Technical specifications

Power consumption	Max. 3 W
Power supply	18 ÷ 36 V DC
Power supply for ANR headset	18 ÷ 36 V DC
max. 0.5 A (from external power source)	-32°C ÷ +55°C
Operating temperature range	-32°C ÷ +55°C
Storage temperature range	-50°C ÷ +70°C
Electromagnetic compatibility	MIL-STD-461 F
Environment requirement	MIL-STD-810 G
Shock / vibration	Tracked and wheeled vehicle
Dimensions	178 [L] x 134 [W] x 50 [H] mm
Weight	~0.9 kg