

CREW MEMBER UNIT

CZS-2FFS-FK

The CZS 2FFS FK is the most advanced FONET Crew Member Unit. The device allows to set up calls in the system, to allocate radio stations, to set up a rebroadcast, to control data flow etc. Current settings and possible submenu options are shown as icons on its display. With the icons a user can access any user-specified functionalities including selection of phone numbers, IP addressing, menu navigation and radio set up.

Available versions

CZS-2FFS-FK	Standard version
CZS-2FFS-FK-A	Additional alarm input
CZS-2FFS-FK-H	Additional headset connector
CZS-2FFS-FK-C2	Additional data port (RS-232)
CZS-2FFS-FK-C4	Additional data port (RS-422)
CZS-2FFS-FK-S	Binaural signal input




The device is fitted with a 3-button keyboard which provides an emergency broadcast mode and an access to voice menu of settings (e.g. voice level).

wbgroupamerica.com

WB GROUP 
AMERICA

WB Group America
1800 Diagonal Road Suite 600
Alexandria, Virginia 22314
t: +1 571 366 1772

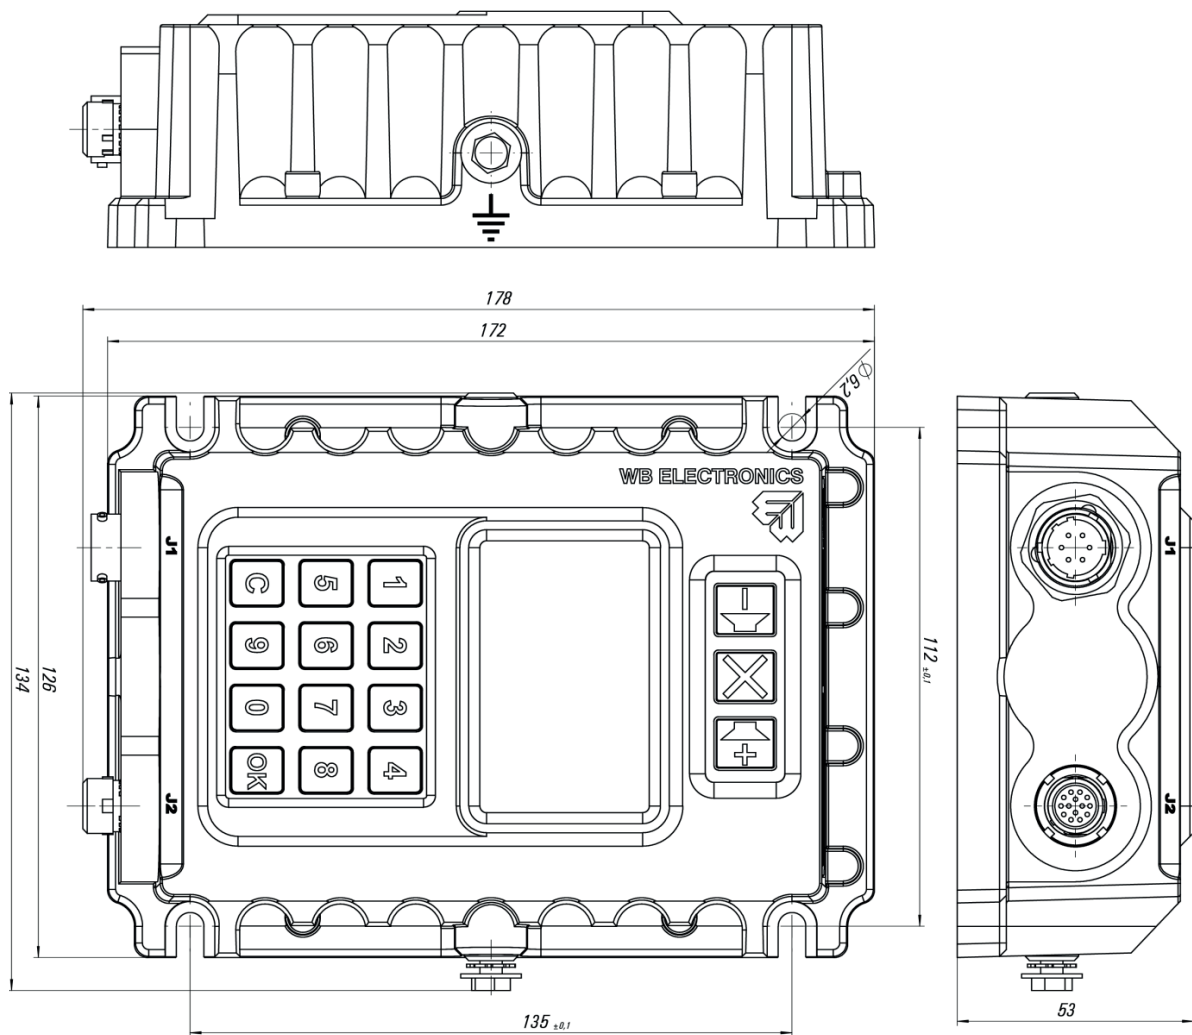

Technical specifications

Power consumption	Max. 3 W
Power supply	18 ÷ 36 V DC
Power supply for ANR headset	18 ÷ 36 V DC
max. 0.5 A (from external power source)	-32°C ÷ +55°C
Operating temperature range	-32°C ÷ +55°C
Storage temperature range	-50°C ÷ +70°C
Electromagnetic compatibility	MIL-STD-461 F
Environment requirement	MIL-STD-810 G
Shock / vibration	Tracked and wheeled vehicle
Display	OLED
Dimensions	178 [L] x 134 [W] x 53 [H] mm
Weight	~1.0 kg