

LOUDSPEAKER UNIT

CZS-2GM

CZS-2GM is specialized loudspeaker for intercom voice streams playing e.g. broadcast, alarm information and radio monitoring. It can be used in the driver's and command cabin or troops' compartment. It is especially useful for crew who are not equipped with headsets.

- **Robust speaker**
- **Build-in amplifier**
- **Simple volume adjustment**
- **Necessary in all vehicles**
- **Contains 8 W amplifier and six-volume level switch**


The loudspeaker CZS-2GM is resistant to environmental conditions.



www.wbgroup.pl

WB ELECTRONICS 
WB GROUP

WB Electronics S.A.
ul. Poznańska 129/133, 05-850 Ożarów Mazowiecki, Poland
t: +48 22 731 25 00 | f: +48 22 731 25 01
info@wb.com.pl

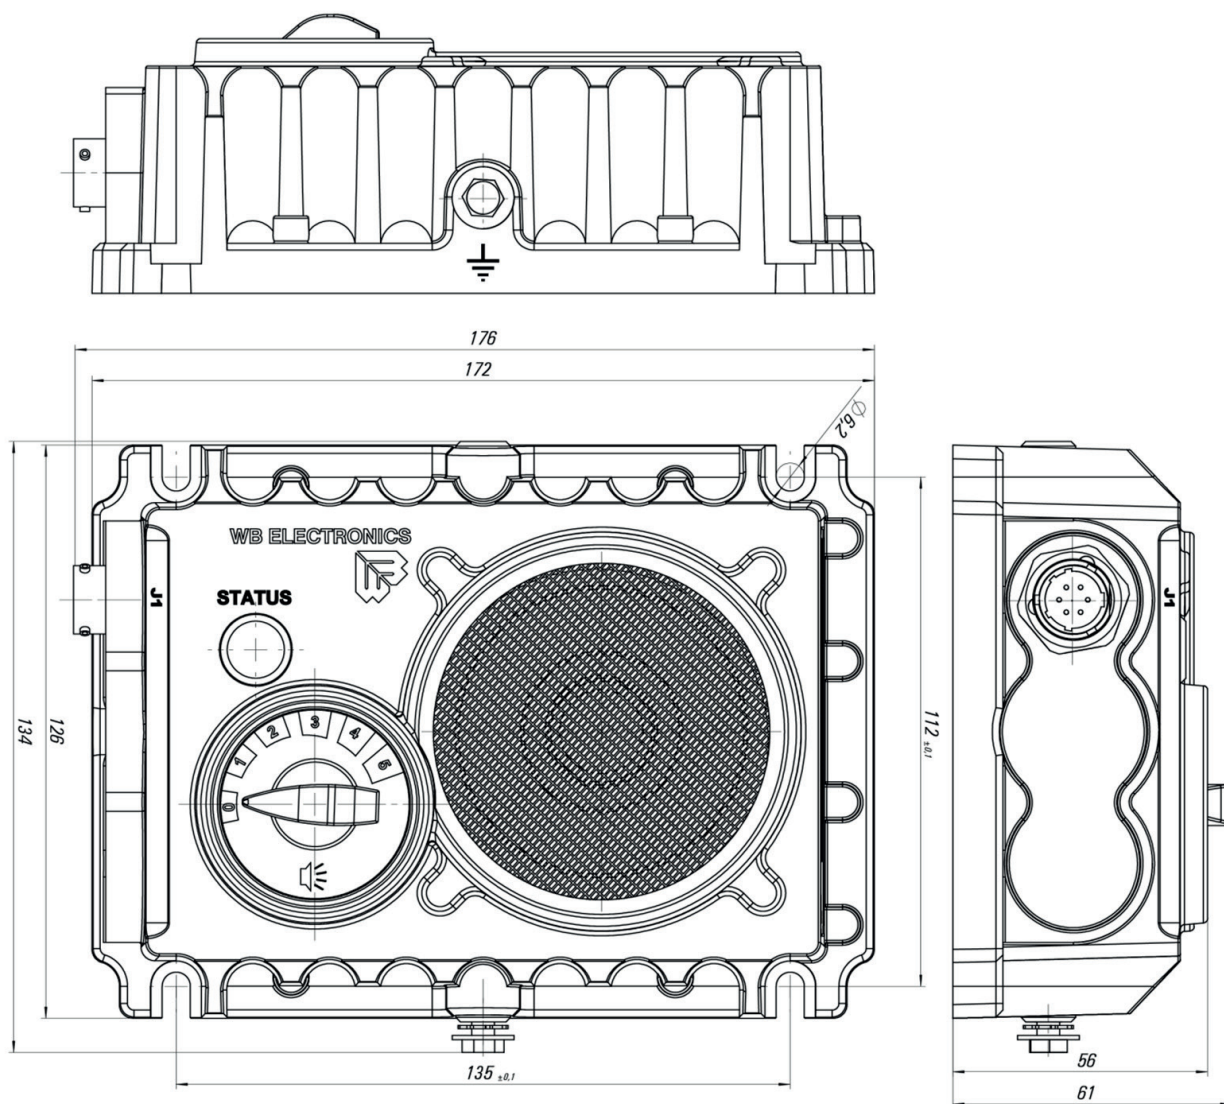

Technical specifications

| | |
|-------------------------------|--------------------------------------|
| Power consumption | Max. 18 W |
| Power supply | 18 ÷ 36 V DC |
| Operating temperature range | -32°C ÷ +55°C |
| Storage temperature range | -50°C ÷ +70°C |
| Electromagnetic compatibility | MIL-STD-461 F |
| Environment requirement | MIL-STD-810 G |
| Shock / vibration | Tracked and wheeled vehicle |
| Dimensions | 176 [L] x 134 [W] x 61 [H] mm |
| Weight | ~1.2 kg |